


MVS 45 Series Lid Shocks Replacement

Recommended tools:

- Metric hex (Allen) wrench set
- Metric box wrench set



Picture # 1

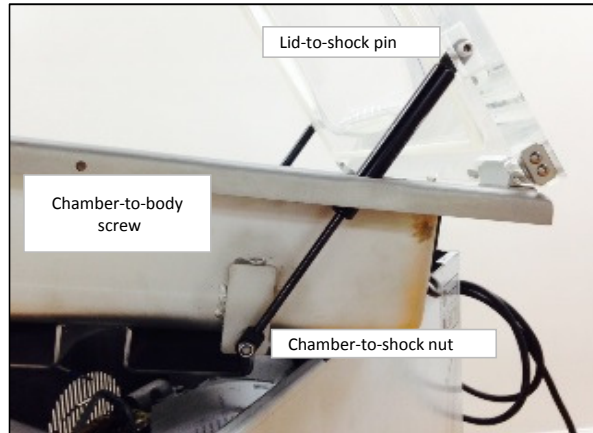

Picture # 2

- Step 1. Switch off the power and unplug the power cord.
- Step 2. Remove the volume plates from the chamber.
- Step 3. Remove the left and right side chamber-to-body screws.
- Step 4. Carefully lift up the chamber out of the body, spin it 45 degrees and gently let it rest on the body.
(Refer to picture # 1.)
NOTE: Please make sure no wires or hoses are caught underneath, between the chamber and the body.
- Step 5. Remove the both chamber-to shock nuts and the lid-to-shock pins.
- Step 6. Open the lid until the shocks are free from the lid and remove the shocks from the chamber-to-shock bolts.
NOTE: Observe the mounting orientation of the shocks, washer locations and tightness of the nuts on the bolts.
Discard the old shocks accordingly.
- Step 7. Installation of new shocks are reverse process of step 6 and 5.

